Provided by:

HDi

1 Gather equipment.

2 Wear proper personal protective equipment.
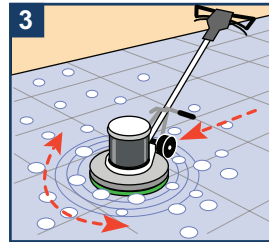
3 Strip or top scrub the floor appropriately before applying any finish. Make sure there is no residue left on the floor. Rinse if needed.
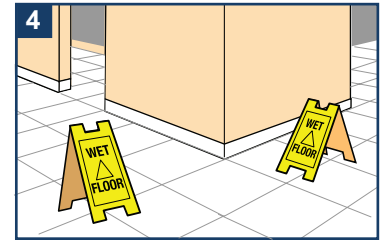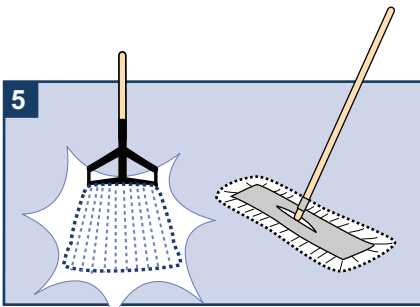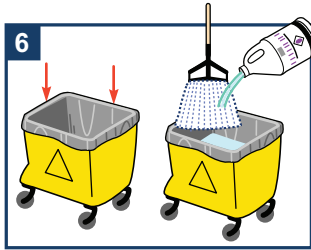
4 Place wet floor signs at all entranceways.
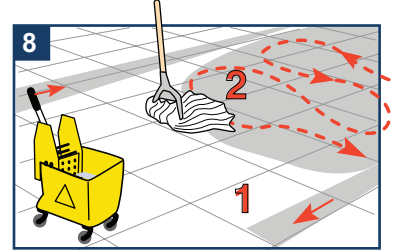
5 Use a clean finish mop. Rinse mop in clean water before using.

6 Line the bucket with a trash bag to protect the floor finish. Pour the finish in the bucket onto the mop to reduce foaming
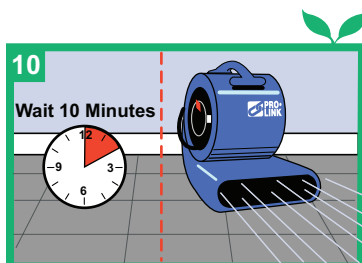
7 Wring out the bottom half of the mop until the finish stops dripping.
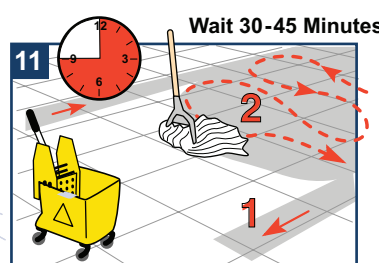
8 Outline the area. Using the figure 8 motion, fill in the area with finish. On first coat, leave it 6-12 inches away from the walls.

9 Flip the mop to get more finish.

10 Wait 10 Minutes
After at least 10 minutes, place a floor fan above the finish to speed the dry time. Ensure the fan is not blowing onto the finish.

11 Wait 30-45 Minutes
Recoat when the floor finish is dry to the touch: 30 to 45 minutes depending on the weather. Temperature, humidity and ventilation will affect dry time.

12 Properly clean and store equipment.

= Green Cleaning Process

Green Cleaning Tips

- Select appropriate floor finishes that are extremely durable to minimize the strip out or top scrub process.
- Build a solid base of floor finish.
- Develop a program to maintain the floors on a regular basis, improving the life of the floor finish.
- Properly maintain entranceways with mats to stop soil from entering the facility and to protect the floor finish.

Pro-Link, Inc.